


WXT Series 10 Foot Universal Access Table with H-Type Thermo-plastic Coated Perforated Steel Top and Seats

SPECIFICATION BULLETIN
#SPC-TB-175

REV. 09-17

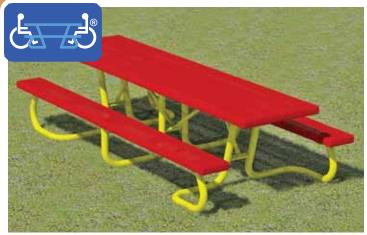

Model WXT/CY-10HR 10 Ft. Portable, Universal Access Rectangular Table with yellow powder coated frames and red H-Type thermo-plastic coated perforated steel top and seats

- Constructed specifically for heavy use areas
- Top and seats designed for more abusive environments such as high elevations where snow loads can destroy average tables
- Nontip, nontrip, walk-through design, wheelchair accessibility at each end
- Full capacity seating when wheelchairs are not in place
- All welded end frames are fabricated from 2-3/8" diameter steel pipe
- Diagonal braces align and strengthen entire table
- Frames are hot dip galvanized after fabrication for superior corrosion resistance
- Thermo-plastic Coating heat fused to Perforated Steel Top and Seats for durability
- Thermo-plastic Coating formulated with U.V. stabilizers for ultraviolet protection
- Limited Lifetime Warranty on frames

AVAILABLE OPTIONS

Powder Coat Finish in choice of colors on steel frame components

Choice of colors of Thermo-plastic Coating

SPECIFICATIONS:

- WXT Series end frames are one-piece welded construction, fabricated from 2.375" (2-3/8") O.D. x 10 ga. wall steel pipe to meet 2" nominal steel pipe size specifications with 2" x 2" x 1/8" die-formed steel angle for attaching seats and top. Bends are tightly formed to prevent tipping when weight is on one side
- Frame design provides the ADA recommended wheelchair clearances under the table top of: 30" wide, 27" high and 24" total knee and toe clearance (19" knee + 5" toe) at each end of the table while maintaining full seating capacity of the table
- Table frame design incorporates nontip, nontrip, walk-through features.
- Model WXT/G-10 is a nom. 10 ft. in length with three frames.
- Nominal table height is 30". Frame design provides a nominal 28" of clearance from ground level to the underside of table. Nominal seat height is 18".
- Frames are supported by diagonal braces of 1-5/16" O.D. x 14 ga. wall steel pipe connected to the table top.
- All fasteners are provided for assembly.
- **Standard:** All steel frame components are hot-dip galvanized after fabrication to ASTM-A123 to maintain an average zinc coating of 2.0 oz. per sq. ft. of surface area (indicated by "/G" in model no., e.g. WXT/G-10HW).
- **H-Type** table top and seats are each a one-piece welded construction, fabricated from a 14ga. perforated steel surface with 9/16" dia. holes in a 13/16" center to center in-line pattern and 2-1/2" x 10 ga. roll-formed vertical edges on all sides reinforced by a 10 ga. die-formed angle substructure. Substructure includes all mounting holes for easy assembly of table.
- **Standard:** All steel surfaces of the top and seats are covered with a thermo-plastic coating in a Brown color (indicated by "HW" in model no., e.g. WXT/G-10HW). The UV-stabilized thermo-plastic coating is applied in a multi step process of material preparation and finish application designed to permanently heat fuse and bond the finish to the steel. The thermo-plastic polyethylene finish is impact resistant, does not support mold or mildew, and the textured matte surface is less susceptible to marring and scuffing.
- **Optional:** All steel frame components have powder coat finish. See Specification Bulletin #SPC-CO-001.
- **Optional:** Color choices of Thermo-plastic coated steel components. For optional colors choices see Specification Bulletin #SPC-CO-001.
- •U.S. Patent Nos. D489,539; D490,992; D493,291; D496,799; D497,262; 6,918,630

RJ Thomas Mfg. Co., Inc.

